




鑫潮气动


CE ISO9001:2008



2L(US) 系列二位二通电磁阀




订购码	2L	170	15	AC110V	
规格代码	2L:蒸汽型 二位二通电磁阀	流量孔径 170:17mm 200:22mm 300:30mm 500:50mm	接管口径 10:G3/8" 15:G1/2" 20:G3/4" 25:G1" 35:G1 1/4" 40:G1 1/2" 50:G2"	标准电压 DC12V DC24V AC24V 50Hz/60Hz AC36V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	接线形式 空白:引线式 铁壳线圈 D:接线盒式 塑封线圈



规格

型号	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
工作介质	空气、水、蒸汽						
动作方式	先导式						
型式	常闭型						
流量孔径(mm)	17		20	30	50		
CV值	4.8		12	20	48		
接管口径	G3/8"	G1/2"	G3/4"	G1"	G1 1/4"	G1 1/2"	G2"
使用流体粘滞度	20 CST以下						
使用压力(MPa)	空气、水、蒸汽:0.1~1.5MPa						
最大耐压力(MPa)	2.25MPa						
工作温度范围(°C)	-5~+180°C						
使用电压范围	±10%						
本体材质	黄铜						
油封材质	PTFE						

外形尺寸

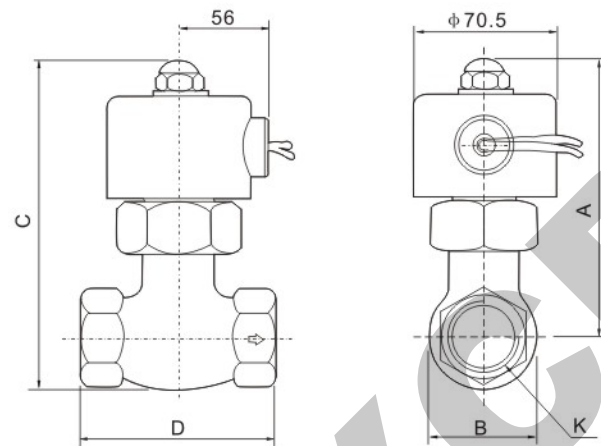

尺寸表

型号	A	B	C	D	K
2L170-10	125	38	146	76	G3/8"
2L170-15	125	42	146	81	G1/2"
2L170-20	125	47	146	84	G3/4"
2L200-25	136	54	162	91.5	G1"
2L300-35	148	76	185	111	G1 1/4"
2L300-40	148	76	185	111	G1 1/2"
2L500-50	176	88	223	164	G2"



XC XCP C

www.china-xcpc.com




VX 系列二位二通电磁阀



订购码	VX2120	08	A	AC220V	
规格代码		接管口径 06:G1/8" 08:G1/4" 10:G3/8" 15:G1/2"	安装代号 空白:标准型 A:大流量口径	标准电压 DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	

外形尺寸

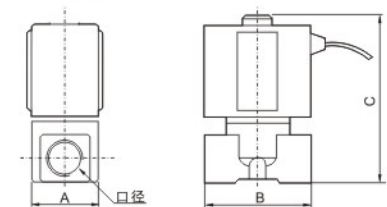

规格

型号	VX2120-06	VX2120-08	VX2120-10	VX2120-10A	VX2120-15
工作介质	空气、水、蒸汽				
动作方式	直动式				
型式	常闭型				
使用压力(Mpa)	0~1.0MPa				
流量孔径(mm)	3	10	13		
接管口径	G1/8"	G1/4"	G3/8"	G3/8"	G1/2"
使用温度范围(°C)	-5~+150°C		-5~+80°C		
油封材质	VITON		NBR		

型号	口径	A	B	C
VX2120-06	G1/8"	26	40	66
VX2120-08	G1/4"	26	40	66
VX2120-10	G3/8"	40	48	80
VX2120-10A	G3/8"	47	66	88
VX2120-15	G1/2"	47	66	88

VXF 系列电磁阀




订购码	VXF2150	06	AC220V	
规格代码		接管口径 06:G3/4" 10:G1" 14:G1 1/2"	标准电压 DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	接线形式 空白:引线式 铁壳线圈 D:接线盒式 塑封线圈

规格

型号	VXF2150-06	VX2160-10	VX2280-14
接管口径	G3/4"	G1"	G1 1/2"
最大操作差压	1.0MPa		
最小操作差压	0.031MPa		
截面 (mm)	20	27	40
有效截面积	170	330	810
CV值	9.5	18.5	45
排气孔	Rc(PT)1/4		

外形尺寸

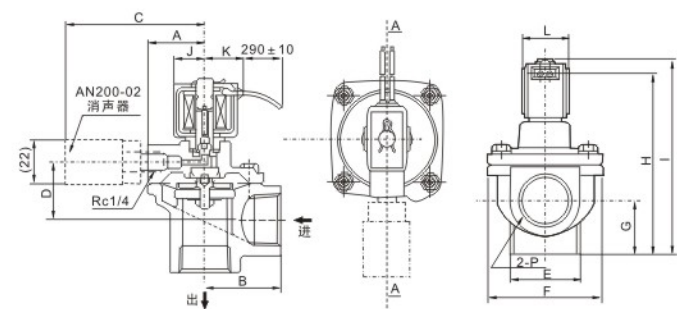

尺寸表

型号	A	B	C	D	E	F	G	H	I	J	K	L	P
VXF2150	33	40	85	32.5	36	66	25	103	113	20	23	30	G3/4"
VXF2160	37	48	89	38	45	74	33.5	118	127	20	23	30	G1"
VXF2280	28	68	81	58	73	110	62.5	174	184	23	25	35	G1 1/2"