



鑫潮气动

CE ISO9001:2008



XCPC

www.china-xcpc.com

JMJ 系列机械阀



订购码

JMJ

规格代码
接管口径: G1/4"
二位三通机械阀

01


型号/按钮类型
01:选择型旋钮
02:加长型旋钮
03:带锁型按钮
04:大圆型按钮
05:平圆型按钮
06:凸圆形按钮
07:滚轮型

规格


型号	JMJ-01、02、03、04、05、06、07
接管口径	G1/4"
工作介质	空气
温度范围	0~60℃
压力范围	0~1MPa
有效截面积	2.5mm ²
润滑	不需要

外形尺寸


JMJ-01




JMJ-03




JMJ-05




JMJ-07




01




02




03




04




05



06



07



JM 系列机械阀



规格

型号	JM-05 JM-06 JM-06A JM-07
工作介质	经40微米过滤的空气
位通数	二位三通,二位二通
接管口径	G1/4"
使用压力范围	0~0.8MPa
使用温度范围	0~60℃

尺寸表

型号	JM-05 JM-06 JM-06A JM-07
A	114 111 96 84.5
B	36.5 39.5 39.5 42.5

订购码


JM

规格代码
截止式机械阀

05

按钮形式
05:选择型旋钮
06:带锁型按钮
06A:平圆型按钮
07:滚轮型

外形尺寸

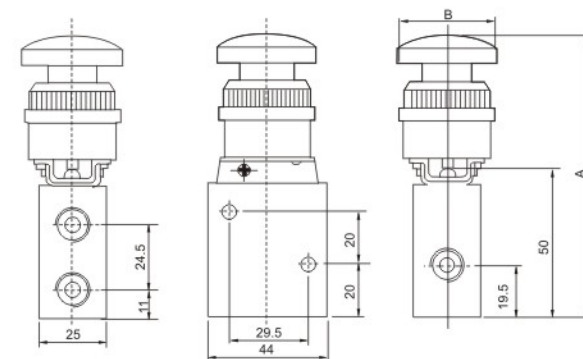

MOV 系列机械阀



规格

型号	MOV-01 MOV-02 MOV-03 MOV-04
工作介质	空气
位通数	二位二通
接管口径	G1/8"
使用压力范围	0~0.8MPa
使用温度范围	0~70℃

订购码

MOV


规格代码
机控、手控阀

01


按钮形式
01:选择型旋钮
02:滚轮型
03:带锁型按钮
04:平圆型按钮

外形尺寸


MOV-02

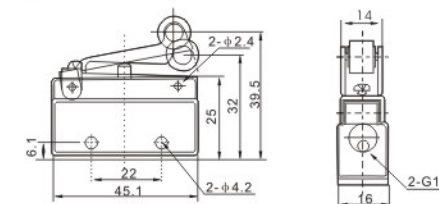

MOV-01



MOV-03



MOV-04

